


INON

INON Underwater Tripod System Specifications

This table provides detailed size information for different configurations with various compatible arms installed on the 「UW Tripod Hub」 or 「UW UW Tripod Hub + UW 3-Way Panhead」.

- Glossary** :
- Overall height (E/H)** : The height to camera plate with tripod legs fully extended (when using Carbon Telescopic Arms), opening angle set to “Middle” and elevator raised to its **highest** position
 - Overall height (E/L)** : The height to camera plate with same conditions above except position of the elevator which is set to its **lowest** position.
 - Minimum height** : The height to camera plate with opening angle set to “Low”.
 - Collapsed length** : Overall length when all tripod legs collapsed for transporting or storage.

E/H stands for Elevator High, E/L stands for Elevator Low

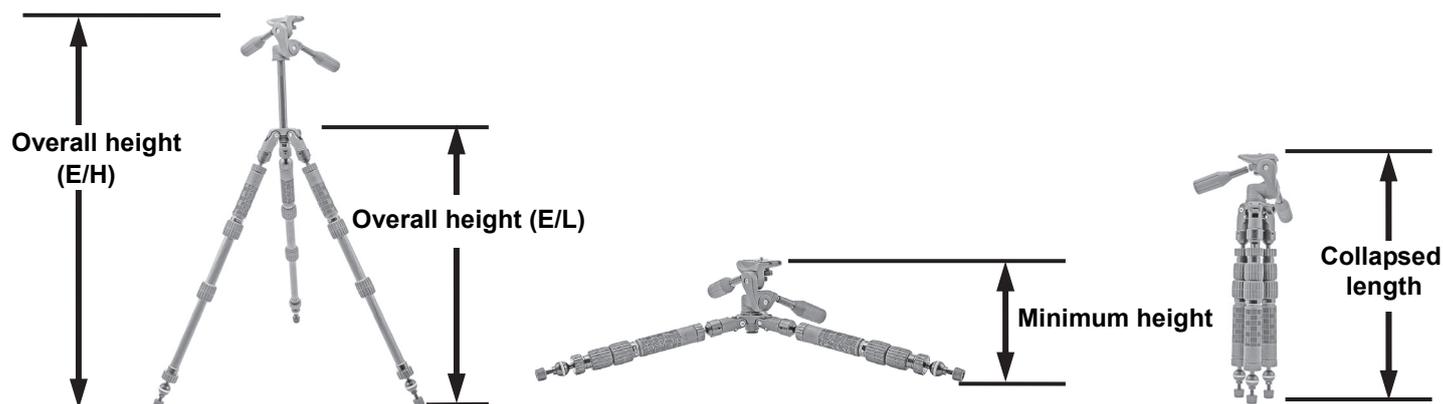

| Combined Arms | Overall height (E/H) | | Overall height (E/L) | | Minimum height | | Collapsed length | |
|--------------------------|----------------------|----------------------------|----------------------|----------------------------|----------------|----------------------------|------------------|----------------------------|
| | Tripod Hub | Tripod Hub + 3-Way Panhead | Tripod Hub | Tripod Hub + 3-Way Panhead | Tripod Hub | Tripod Hub + 3-Way Panhead | Tripod Hub | Tripod Hub + 3-Way Panhead |
| Carbon Telescopic Arm SS | 500mm (1.6ft) | 585mm (1.9ft) | 500mm (1.6ft) | 440mm (1.4ft) | 500mm (1.6ft) | 160mm (6in) | 500mm (1.6ft) | 395mm (1.3ft) |
| Carbon Telescopic Arm S | 700mm (2.3ft) | 785mm (2.6ft) | 555mm (1.8ft) | 640mm (2.1ft) | 85mm (3in) | 170mm (7in) | 380mm (1.3ft) | 465mm (1.5ft) |
| Carbon Telescopic Arm M | 945mm (3.1ft) | 1,030mm (3.4ft) | 800mm (2.6ft) | 885mm (2.9ft) | 100mm (4in) | 185mm (7in) | 470mm (1.5ft) | 555mm (1.8ft) |
| Carbon Telescopic Arm L | 1,185mm (3.9ft) | 1,270mm (4.2ft) | 1,040mm (3.4ft) | 1,125mm (3.7ft) | 115mm (5in) | 200mm (8in) | 560mm (1.8ft) | 645mm (2.1ft) |
| Stick Arm XS-T | 320mm (1.1ft) | 405mm (1.3ft) | 175mm(※) (7in) | 260mm(※) (10in) | 55mm (2in) | 140mm (6in) | 190mm (7in) | 275mm (11in) |
| Stick Arm SS-T | 360mm (1.2ft) | 445mm (1.5ft) | 220mm (9in) | 305mm (1ft) | 65mm (3in) | 150mm (6in) | 235mm (9in) | 320mm (1.1ft) |
| Stick Arm S-T | 390mm (1.3ft) | 475mm (1.6ft) | 245mm (10in) | 330mm (1.1ft) | 70mm (3in) | 155mm (6in) | 265mm (10in) | 350mm (1.2ft) |
| Stick Arm M-T | 435mm (1.4ft) | 520mm (1.7ft) | 290mm (11in) | 375mm (1.2ft) | 80mm (3in) | 165mm (6in) | 320mm (1.1ft) | 405mm (1.3ft) |

(※) Without Lower Elevator being attached as it will conflict with the ground.

INON INC.
 2-18-9 Dai, Kamakura, Kanagawa 247-0061 JAPAN
 E-mail: support@inon.co.jp Fax: +81(0)467-48-2178
 URL : <http://www.inon.jp/>

As of May 2018